
APPENDIX 4

TASK DISPATCHING PROCEDURES

INTRODUCTION

As part of the Dispatch Priorities function, PressureMAP assigns a specific Task Dispatching Procedure number for each of its prioritized dispatches and alarms. This number appears on the Detailed Task Report on the line below the Task # and Device # information (see REPORT A4-1). Detailed Task Reports are provided either by AlarmMAP (if the Full Report delivery mode is specified), or they can be obtained from PressureMAP's Dispatch Priorities option by entering the desired Task # at the **Task Dispatching for which Task #?** prompt.

There are six possible Task Dispatching Procedures recommended by PressureMAP. Each pertains to one or more possible dispatching or alarm conditions. The steps required to perform each of the Task Dispatching Procedures are described in the following pages. It must be understood that these simplified procedures have been provided to help in your leak locating efforts. In no way are they intended to substitute for formal leak locating training.

Procedures "1", "2", "3" and "6" reference one of System Studies' seven Leak Locating Worksheets. Once the initial analysis of the Detailed Task Report has been performed, these worksheets direct technician activity by providing a step-by-step approach to locating the condition causing the dispatch or alarm. Equipped with a Detailed Task Report, a copy of the office stickmap, a Device Log by Location Report, a set of Leak Locating Worksheets and a working knowledge of cable pressurization leak locating tools and techniques, technicians will be able to respond quickly and efficiently to pressurization dispatches and alarms.

What follows is a simplified explanation of each Task Dispatching Procedure.

Task Dispatch Procedure #1

Problem: A low pressure transducer reading

Procedure:

- 1) Analyze all data on the Task Dispatching Report for possible problematic field situations such as:
 - "Bad"/"Stuck" transducer. A non-varying transducer reading over an extended period of time can point to a transducer that is stuck or reading incorrectly.
 - Trouble on the pair. Extreme fluctuations in a device's readings can signify a conductor pair problem.
 - Maintenance intervention. Cheater hoses, auxiliary air sources and incorrect device calibration are examples of maintenance intervention. Occurrences such as these destroy the integrity of a cable pressurization monitoring system without PressureMAP to report them.

OPERATIONS

```

Task Dispatching Info for SCRUZ12, T -069                                PressureMAP XX.XX.XX
01/02/2005 17:29                                                       System Studies Incorporated
-----
Task #    Device #    Condition                                                    Level
-----
00202E7 T -069    Manifold/meter panel flow gained 5.0 scfh in 24 hr        ****

                Reading was 11.0 scfh at 17:18 on 01/02/05 VALIDATED

Task Dispatch Procedure #3

Probable Cause: Leak Close to Flow Device, Construction
                Intervention, Pair Trouble.
Procedure: Use Worksheets B or C to Determine Area of Search /
                Locate Trouble / Check the Cable Pair.

Device #: T -069                                Type: MF Range: 20.0 S-M: 15.0
Address: MH-5, CENTER AVE                        Loc: 26 Pipe: A OAU: 18.7
Sheath(s): 01 07 13

Cable: 01 Prim Pair: 896 Sec Pair: R Sort Key:
Plat #: Stickmap: 1 Phone:

Office 1 Loc: 25 Distance 1 (kf): 3.0 Field 1 Loc: 27
Office 2 Loc: Distance 2 (kf): Field 2 Loc:

Remarks:
Readings  Curr Last Tdy -1 -2 -3 -4 -5 -6 Wk-1 Wk-2 Wk-3 Wk-4
-----
                11.0 11.0 11.0 6.0 5.5 6.0 6.0 5.5 6.0 6.0 6.0 6.0 6.0
=====
ASSOCIATED DEVICES TOWARD THE OFFICE
=====

Device #: T -068                                Type: UP
Address: MH-4, CENTER AVE                        Loc: 25 Pipe: A
Sheath(s): 01

Readings: Curr Last Tdy -1 -2 -3 -4 -5 -6 Wk-1 Wk-2 Wk-3 Wk-4
-----
                6.5 6.5 6.5 8.0 8.0 8.0 8.0 8.0 8.0 8.0 8.0 8.0 8.0

***** PROJECTED LEAK LOCATION *****
*
*
*          LOC 26
*      <- OFFICE      MH-5, CENTER AVE      FIELD ->
*          TD T -069      TYPE MF
*      MH-4, CENTER AVE      11.0 SCFH
*
*
* < 25 >----- [ LEAK ]
*          <- 3.0KF ->
*
*
*
*
*****

```

REPORT A4-1: DETAILED TASK REPORT

- 2) Use the Device History function to look up all devices on a pipe/sector, and to provide additional device history if needed.
- 3) If applicable, select "History of all devices at a manhole/address," and provide the technician with manhole/address information for devices in the dispatched transducer manhole. Repeat this procedure for manholes on either side of the dispatched pressure transducer manhole.
- 4) Using all the collected and analyzed data, determine the area of search.
- 5) Dispatch the technician to commence leak locating and to complete Worksheet D.

APPENDIX 4 TASK DISPATCHING PROCEDURES

(For additional information on pressure transducers, refer to the System Studies Incorporated *Cable Pressurization Theory and Practice* book: pages 2-33 through 2-39).

Task Dispatch Procedure #2

Problem: A high flow increase at a pipe alarm panel, or a drop in endpoint pipe pressure on a system with or without flow transducers on air pipe manifolds.

Procedure:

- 1) Reference "History of all devices on a pipe/sector." Examine all pressure and flow transducer readings on the route for any significant changes.
- 2) If there is an air pipe manifold that shows a significant flow increase, dispatch the technician to the manifold to chase the highest flowing cable and to complete Worksheet B.
- 3) If there is either a decrease in air flow or no measurable change of flow at the manifold locations, dispatch the technician to perform air pipe purification procedures.

(For additional information, refer to the System Studies Incorporated *Cable Pressurization Theory and Practice* book: pages 3-31 and pages 3-51 through 3-54)

Task Dispatch Procedure #3

Problem: A high flow at a distribution panel, or a high flow at an air pipe manifold, or a high flow at a lateral flow transducer on a system with flow transducers on the air pipe manifolds.

Procedure:

- 1) Reference "History of all devices on a pipe/sector." Examine all pressure and flow transducer readings on the route for any significant changes.
- 2) Using the stickmap listed in Specific Device Information, find the location of devices within the dispatched device's sphere of influence (in case of a distribution panel, the sphere of influence is, approximately, the first 3,000 feet out of the office).
- 3) For a dispatch at an air pipe manifold: A) examine flows at the manifolds on both sides of the dispatched manifold, and B) determine the manifold's Sphere of Influence. Dispatch the technician to commence leak locating and to complete Worksheet C.

Problem: A high flow at a distribution panel, or a high flow at an air pipe manifold, or a high flow at a lateral flow transducer on a system without flow transducers on the air pipe manifolds.

Procedure:

- 1) Select Option 3, Specific Device Information, for the dispatched device and note the following information: type, pipe, cable, pair, readings, OAU and stickmap.
- 2) Examine all pressure transducer readings on the route for any significant changes.
- 3) For a dispatch at a distribution panel: dispatch the technician to read all flows and to complete Worksheet C.

OPERATIONS

(For additional information, refer to the System Studies Incorporated *Cable Pressurization Theory and Practice* book: pages 3-32 and 3-54.)

Task Dispatch Procedure #4

Problem: A zero flow condition at a distribution panel, a zero flow condition at an air pipe manifold, or a zero flow condition at a pipe alarm panel on a system with flow transducers on air pipe manifolds.

Procedure:

- 1) Look at Device Histories for the dispatched device and note the following information: type, pipe, cable, pair, readings, OAU and stickmap.
- 2) Refer to "History of all devices on a pipe/sector" to examine flows and pressures for all devices located on the same pipe as the dispatched device.
- 3) Reference the stickmap listed in Specific Device Information to find the location of devices within the dispatched device's Sphere of Influence (in the case of the distribution panel, the Sphere of Influence is approximately the first 3,000 feet out of the office).
- 4) Dispatch technician to the device location to check for: A) a pipe alarm panel, distribution panel, or air pipe manifold that is turned off, or B) a transducer problem.

Problem: A zero flow condition at a distribution panel, or a zero flow condition at an air pipe manifold, or a zero flow condition at a pipe alarm panel on a system without flow transducers on air pipe manifolds.

Procedure:

- 1) Look at "History of all devices on a pipe/sector". Examine all pressure transducer readings on the route for any significant changes.
- 2) Reference the stickmap listed in Specific Device Information to find the location of devices within the dispatched device's Sphere of Influence.
- 3) Dispatch technician to the device location to check for: A) a pipe alarm panel or distribution panel that is turned off, or B) a transducer problem.

(For additional information, refer to the System Studies Incorporated *Cable Pressurization Theory and Practice* book: pages 2-10 through 2-23 for pipe alarm panels, distribution panels and air pipe manifolds; pages 2-39 through 2-37 for flow transducers.)

Task Dispatch Procedure #5

Problem: A device with an error reading

Procedure:

- 1) Refer to Specific Device Information for the dispatched device and note the following information: type, pipe, cable, pair, readings, OAU and stickmap.
- 2) Dispatch the technician to the device location to determine the cause of the error reading.

Task Dispatch Procedure #6

Problem: A high flow at a pipe alarm panel over an extended period of time, or a low delivery pressure at an end point pressure transducer over an extended period of time on a system with flow transducers on air pipe manifolds.

Procedure:

- 1) Look at Specific Device Information for the dispatched device and note the following information: type, pipe, cable, pair, readings, OAU (if applicable) and stickmap.
- 2) Refer to "History of all devices on a pipe/sector" to examine flows and pressures for all devices located on the same pipe as the dispatched device.
- 3) Reference the stickmap listed in Specific Device Information to find the location of all air pipe manifolds on the same pipe as the dispatched device.
- 4) Compare the air pipe flow at pipe alarm panels with the total of all the air pipe manifold flows.
- 5) If the manifold flows do not add up to within 30 percent of the pipe flow, dispatch the technician to perform pipe purification procedures.
- 6) If the manifold flows add up to within 30 percent of the pipe flow, this signifies that the leak is located somewhere in the cables. Use Specific Device Information to compare flows at the manifolds with each manifold's OAU.
- 7) Dispatch the technician to the manifold that has the greatest difference between the OAU and the actual flow rate. Have the technician complete Worksheet B.

Problem: A high flow at a pipe alarm panel over an extended period of time, or a low delivery pressure at an end point pressure transducer over an extended period of time on a system without flow transducers on air pipe manifolds.

Procedure:

- 1) Look at Specific Device Information, for the dispatched device and note the following information: type, pipe, cable, pair, readings, OAU (if available) and stickmap.
- 2) Dispatch the technician to all air pipe manifolds on the pipe route to read flows. Have the technician compare these flows to manifold OAUs and complete Worksheet A.
- 3) Compare air pipe delivery flow to the total of all relevant manifolds flows.

OPERATIONS

- 4) If the manifold flows do not add up to within 30 percent of the total air pipe flow, dispatch the technician to perform air pipe purification procedures.
- 5) If the manifold flows add up to within 30 percent of the total air pipe flow, compare the actual flows at the manifold with each manifold's OAU. Dispatch technician to the manifold with the greatest difference between the OAU and the flow rate. Have the technician complete Worksheet B.

Leak Locating Worksheets

An integral part of the "field side" of PressureMAP, the Leak Locating Worksheets help to standardize the task dispatching procedures specified by the Dispatch Priorities option.

The best approach to leak locating is based on a logical and organized step-by-step method. With a leak locating strategy, the biggest, most damaging leaks in the system are identified first. These are the leaks that generally bring down route delivery pressure and reduce cable protection throughout the entire system. Only after the primary leaks have been located and repaired, should the emphasis shift to the smaller leaks.

Once the general location of the primary system leak is known, the technician is dispatched to the suspected leak area to verify monitoring device information and to begin a step-by-step leak locating effort.

In addition to providing the technician with the tools and methods for successful leak locating, the Worksheets reinforce and increase technician understanding of pressurization concepts. Zero leak projections and air flow calculations are reliable leak locating tools which eliminate the frustration of trial and error methods. The Worksheets stress the importance of these calculations by incorporating them into the various leak locating procedures. By utilizing the Worksheets and completing the procedures outlined on each, the technician will become a more knowledgeable and efficient leak locating specialist.

Examples of the seven specific Leak Locating Worksheets follow. Additional Worksheets can be ordered directly from System Studies Incorporated by calling (800) 247-8255 or (831) 475-5777.

Worksheet A Reading Air Flows at Manifolds and Meter Panels

Procedure:

At manifold and meter panel locations:

- Step 1** Record meter panel designation or manifold location and associated air pipe. Review Checklist
- Step 2** Record delivery pressure. (Meter Panel should be 10 PSI; manifolds should be a minimum of 7.5 PSI.)
- Step 3** Record air flow in Standard Cubic Feet per Hour (SCFH) for each cable fed by the manifold or meter panel. If flow rater on meter panel is pegged, use portable flow rater (0-20 SCFH). Use Flow Gauge for readings on System Studies Distribution Panels.


Equipment and Procedures Required:

- C Pressure Gauge
- Flow Gauge
- Portable Flow Rater (0-20 SCFH)
- Calculator

Pipe Alarm Panel Flow _____ SCFD _____ SCFH

Pipe Delivery Pressure _____ PSI

Total Flow of all Manifolds _____ SCFH



Task Number: _____

Date: _____

Hours Worked: _____

Office: _____

Pipe Route: _____

Name: _____

FIGURE A4-2: WORKSHEET A (SIDE 2)

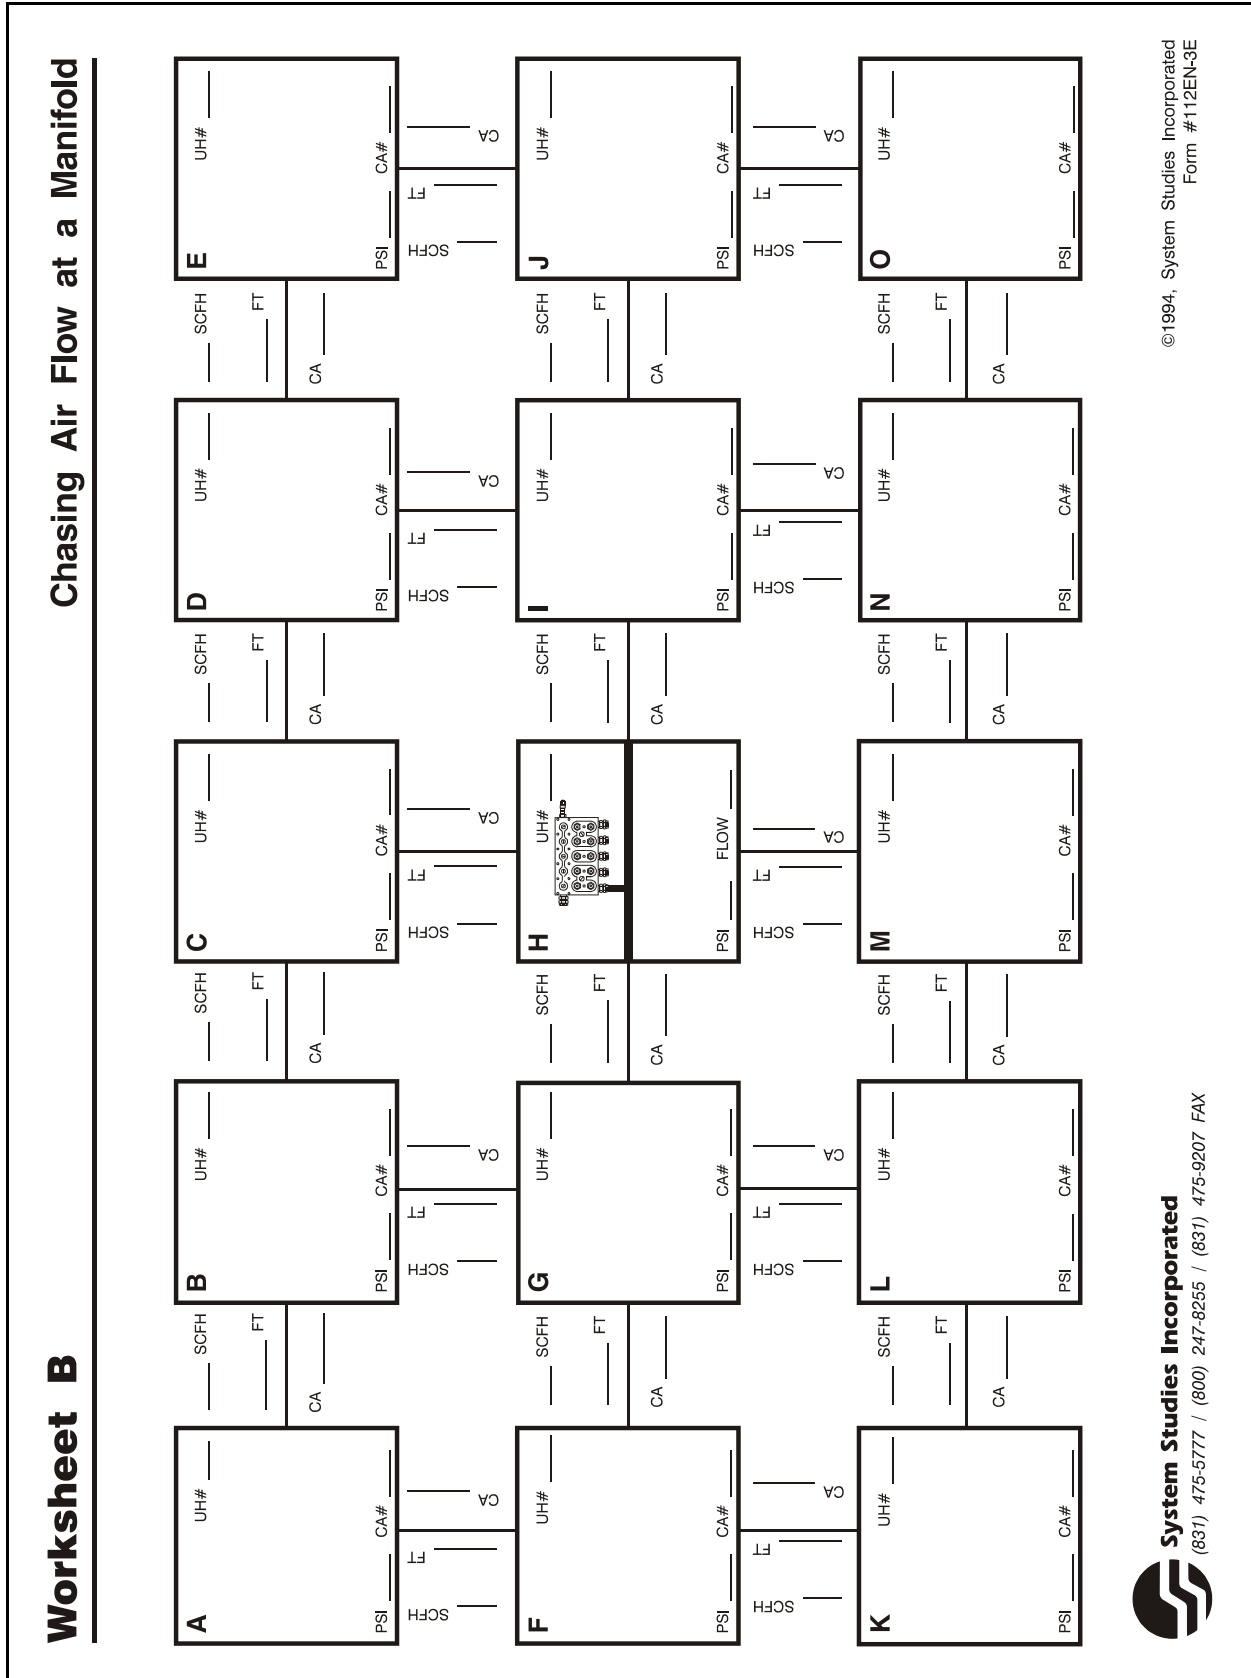


FIGURE A4-3: WORKSHEET B (SIDE 1)

Worksheet B Chasing Air Flow at a Manifold

Procedure:

Step 1 Take flow (SCFH) and pressure readings (PSI) for cable at manifold utility hole. Check for cable leaks. Manifold location on worksheet is designated as Utility Hole H.

Step 2 Calculate a Zero Leak Projection (ZLP) for each direction that a cable leaves Utility Hole H. Fill in ZLP footage calculations on worksheet. This is the area of search.

Step 3 Visit adjacent utility hole on either side of Utility Hole H. This utility hole must be within the calculated Zero Leak Projection. Check for leaks. Calculate air flow between this location and Utility Hole H. If calculated flow is more than 50% of measured air flow at manifold, continue in the same direction. If it is less than 50%, visit the utility hole on other side of the hole.

Step 4 Calculate and record flow between each utility hole entered. After making flow calculations, a Zero Leak Projection should be calculated for all directions cable leaves hole. Utility holes outside ZLP should not be entered.

Step 5 Continue chasing calculated flow until major leak is found.

Step 6 Enter all calculations, footages and cable size on diagram. All Air Flow Calculations and Zero Leak Projections should also be entered on worksheet.

Equipment and Procedures Required:

- C Pressure Gauge
- Flow Gauge
- Portable Flow Rater (0-20 SCFH)
- Flow Direction Indicator
- Ultrasonic Leak Locator or Soap Bucket
- Calculator
- Pneumatic Resistance Charts
- Zero Leak Projection
- Air Flow Calculation

Task Number: _____

Found
 Not Found

Date: _____

Hours Worked: _____

Office: _____

Pipe Route: _____

Name: _____

Cause of Problem:

- Leaking Closure
- Missing Plug
- Leaking Plug
- Leaking Valve
- Section Leak
- Leaking Hardware
- Other _____

©1994, System Studies Incorporated
Form #112EN-2

Review Checklist

FIGURE A4-4: WORKSHEET B (SIDE 2)

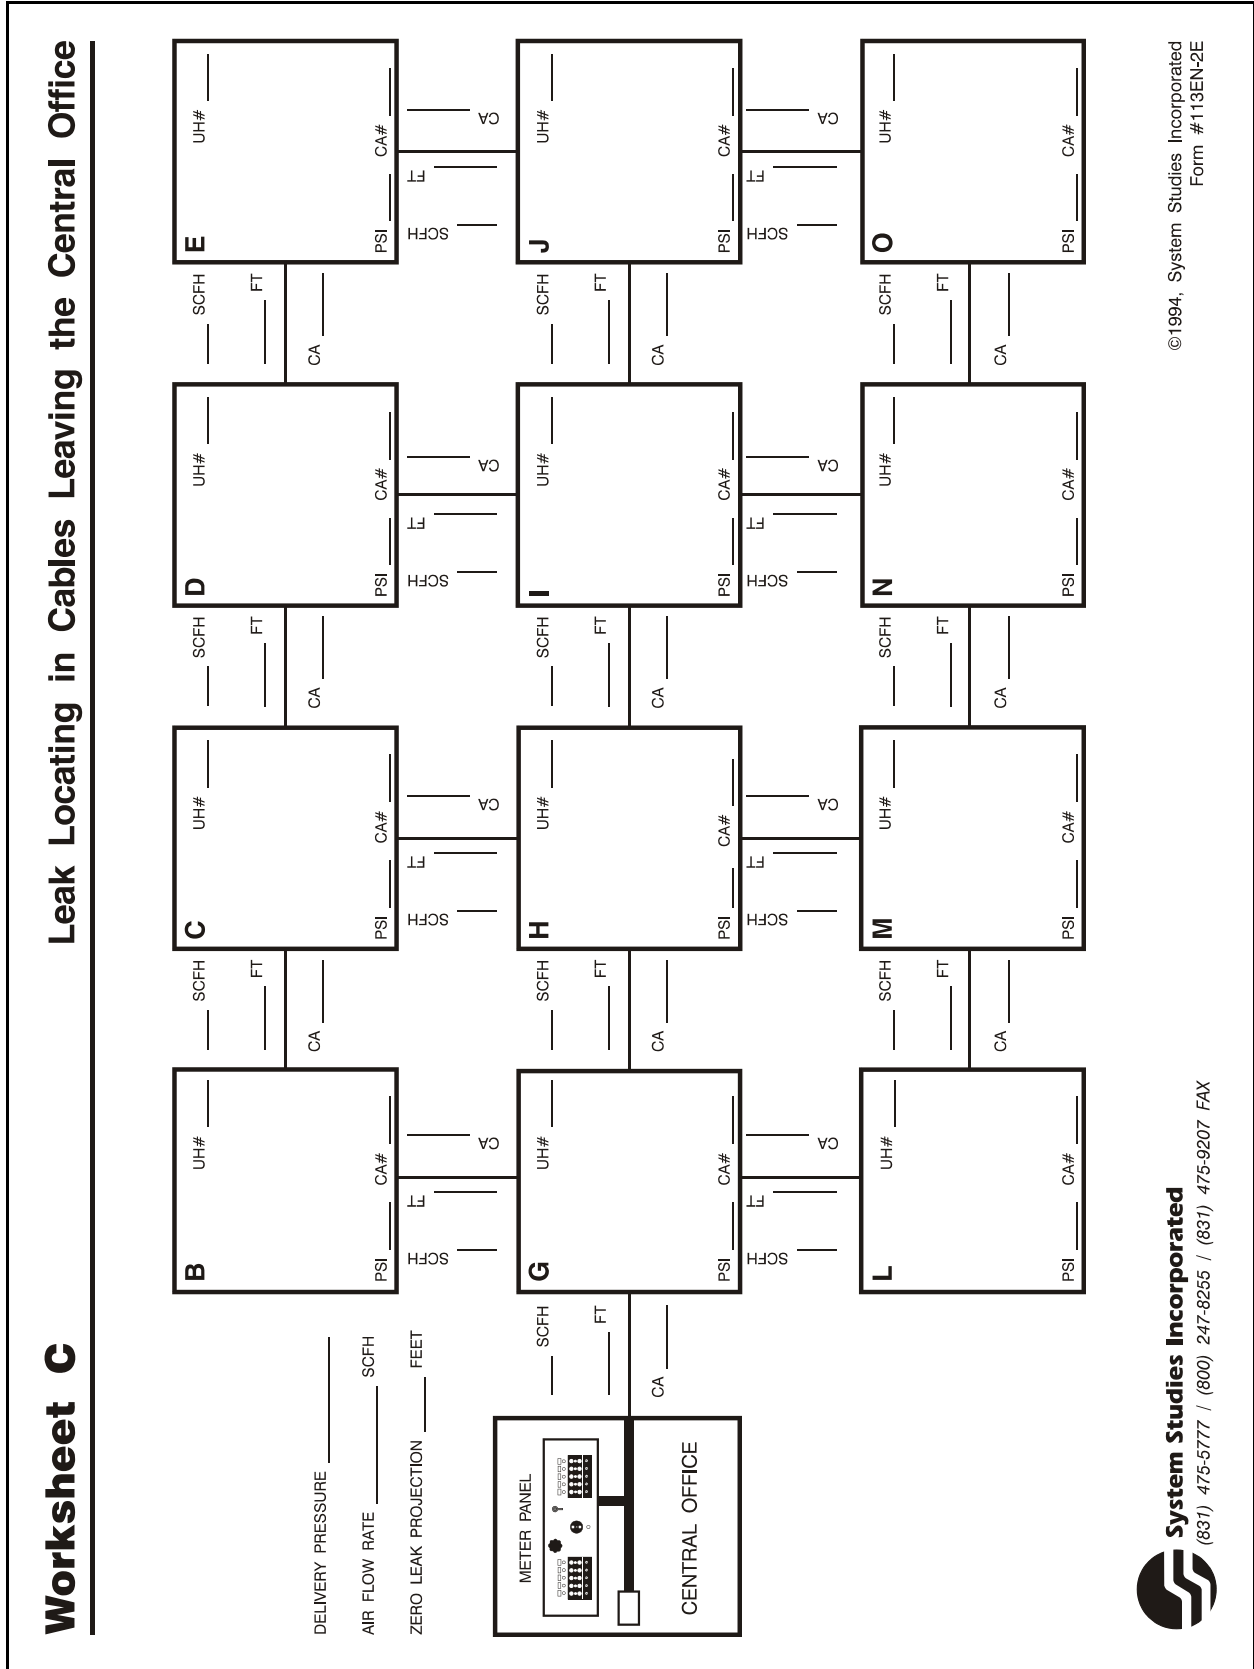


FIGURE A4-5: WORKSHEET C (SIDE 1)

Worksheet C

Leak Locating in Cables Leaving the Central Office

Procedure:

Step 1 Measure and record the flow rate and input pressure of cable. If flowrate is above 10 SCFH, use portable flow rater.

Step 2 Calculate Zero Leak Projection to determine area of search.

Step 3 Verify that the meter panel is installed on correct cable. Check plastic tubing and central office (CO) plug for leaks.

Step 4 Visit utility hole within Zero Leak Projection. Check for leaks. Record pressure. Calculate flow between CO and utility hole. Calculate Zero Leak Projection for all directions cable leaves utility hole. Do not enter utility holes outside Zero Leak Projection.

Step 5 Visit next utility hole or lateral utility hole if it is within new Zero Leak Projection. Check for leaks. Record pressure. Calculate air flow between the two utility holes. If a majority of the flow measured at the C.O. can be accounted for, continue in that direction. If not, check another lateral. Calculate Zero Leak Projection for cable where majority of air flow is calculated.

Step 6 Continue chasing the measured CO flow up laterals until leak is found.

Step 7 Enter all calculations, footages and cable size on diagram. All Air Flow Calculations and Zero Leak Projections should also be entered on worksheet.

Equipment and Procedures Required:

- C Pressure Gauge
- Portable Flow Rater (0-20 SCFH)
- Flow Direction Indicator
- Ultrasonic Leak Locator or Soap Bucket
- Calculator
- Pneumatic Resistance Charts
- Zero Leak Projection
- Air Flow Calculation
- Back Projection (Single Feed Systems Only)

Review Checklist

Task Number: _____

Found
 Not Found

Date: _____

Hours Worked: _____

Office: _____

Cable Number: _____

Transducer Number: _____

Name: _____

Cause of Problem:

Leaking Closure

Missing Plug

Leaking Plug

Leaking Valve

Section Leak

Leaking Hardware

Other _____

© 1994, System Studies Incorporated
Form #113EN-2E

FIGURE A4-6: WORKSHEET C (SIDE 2)


Worksheet D

Leak Locating in Dual Feed Cables

SINGLE FEED _____ DELIVERY PRESSURE _____

DUAL FEED _____

A UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	B UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	C UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	D UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	E UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____
F UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	G UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	H UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	I UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	J UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____
K UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	L UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	M UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	N UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____	O UH# _____ SCFH _____ FT _____ CA _____ PSI _____ CA# _____



System Studies Incorporated
 (831) 475-5777 / (800) 247-8255 / (831) 475-9207 FAX

© 1994, System Studies Incorporated
 Form #114EN-2E

FIGURE A4-7: WORKSHEET D (SIDE 1)

Worksheet D

Leak Locating in Dual Feed Cables

Procedure:

Step 1 Visit pressure transducer (Utility Hole H) to verify and record correct reading. Begin documentation in Utility Hole H. Check to make sure delivery pressure is above 7.5 PSI. This can be accomplished by reading pressure of pipe in pressure transducer (PTD) utility hole or on pipe pressure transducer printout.

Step 2 Visit utility hole on either side of PTD location. Calculate flow through section. If pressure is dropping, continue in same direction. If pressure has leveled off or has increased, visit utility hole on other side of PTD utility hole. Calculate Zero Leak Projection in direction of leak.

Step 3 Continue in direction of dropping pressure. Take pressure readings and record readings on laterals. Calculate air flow. The lateral consuming the majority of the calculated air flow is the one pulling the cable pressure down.

Step 4 Enter all calculations, footages and cable size on diagram. All Air Flow Calculations and Zero Leak Projections should also be entered on worksheet.

Equipment and Procedures Required:

- C Pressure Gauge
- Flow Gauge
- Portable Flow Rater (0-20 SCFH)
- Flow Direction Indicator
- Ultrasonic Leak Locator or Soap Bucket
- Calculator
- Pneumatic Resistance Charts
- Zero Leak Projection
- Air Flow Calculation
- Back Projection (Single Feed System Only)

Review Checklist

Task Number: _____

Found
 Not Found

Date: _____

Hours Worked: _____

Office: _____

Pipe Route: _____

Name: _____

Cause of Problem:

- Leaking Closure
- Missing Plug
- Leaking Plug
- Leaking Valve
- Section Leak Leaking Hardware
- Other _____

©1994, System Studies Incorporated
Form #114EN-2E

FIGURE A4-8: WORKSHEET D (SIDE 2)

Worksheet E

Leak Locating in Single Feed Cables


TRANSDUCER READING _____

CABLE PRESSURE _____

LOCATION/POLE _____

F

POLE/UH# _____



PSI _____

B

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

C

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

D

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

E

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

G

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

H

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

I

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

J

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

L

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

M

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____

N

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____


O

POLE/UH# _____

PSI _____ CA# _____

SCFH _____ FT _____

CA _____



System Studies Incorporated
 (831) 475-5777 / (800) 247-8255 / (831) 475-9207 FAX

©1994, System Studies Incorporated
 Form #115EN-2E

FIGURE A4-9: WORKSHEET E (SIDE 1)

System Studies Incorporated (27-00A4.ASM)

A4-15

Worksheet E

Leak Locating in Single Feed Cables

Procedure:

Step 1 Visit pressure transducer to verify and record cable pressure.

Step 2 Begin leak locating at location where lateral "T's" from the major cable run (Location F on worksheet). Read and record cable pressure. Pressure at this point must be adequate to support minimum lateral cable pressure once leak is found and repaired.

Step 3 Take pressure reading to field side of "T," record reading (Location G), calculate and record flow for section.

Step 4 Use this flow rate and pressure reading to make a Zero Leak Projection (ZLP). If possible, use pressure reading at transducer location to make Back Projection. Search for leak in this area.

Step 5 If impossible to back project (change of cable resistance within ZLP area of search), take reading at next valve and calculate flow. If calculated flow is significantly less than last section, check this section for leaks.

Step 6 Calculate flow up all risers that are within original ZLP. If one lateral has the majority of air being consumed, calculate another ZLP and make a Back Projection.

Step 7 Enter all calculations, footages and cable size on diagram. All Air Flow Calculations and Zero Leak Projections should also be entered on worksheet.

Equipment and Procedures Required:

C Pressure Gauge

Flow Gauge

Portable Flow Rater (0-20 SCFH)

Flow Direction Indicator

Ultrasonic Leak Locator or Soap Bucket

Calculator

Pneumatic Resistance Charts

Zero Leak Projection

Air Flow Calculation

Back Projection (Single Feed System Only)

Task Number: _____

Found

Not Found

Date: _____

Hours Worked: _____

Office: _____

Pipe Route: _____

Name: _____

Cause of Problem:

Leaking Closure

Missing Plug

Leaking Plug

Leaking Valve

Section Leak Leaking Hardware

Other _____

Review Checklist


©1994, System Studies Incorporated
Form #115EN-2E

FIGURE A4-10: WORKSHEET E (SIDE 2)

Worksheet F

Leak Locating on Trunk and Toll

A UH# _____ PSI _____ CA# _____ FT _____ DROP PER FOOT _____	B UH# _____ PSI _____ FT _____ DROP PER FOOT _____	C UH# _____ PSI _____ FT _____ DROP PER FOOT _____	D UH# _____ PSI _____ FT _____ DROP PER FOOT _____	E UH# _____ PSI _____ FT _____ DROP PER FOOT _____	F UH# _____ PSI _____ FT _____ DROP PER FOOT _____	G UH# _____ PSI _____ FT _____ DROP PER FOOT _____	H UH# _____ PSI _____ FT _____ DROP PER FOOT _____	I UH# _____ PSI _____ FT _____ DROP PER FOOT _____	J UH# _____ PSI _____ FT _____ DROP PER FOOT _____	K UH# _____ PSI _____ FT _____ DROP PER FOOT _____	L UH# _____ PSI _____ FT _____ DROP PER FOOT _____	M UH# _____ PSI _____ FT _____ DROP PER FOOT _____	N UH# _____ PSI _____ FT _____ DROP PER FOOT _____	O UH# _____ PSI _____ FT _____ DROP PER FOOT _____
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---



System Studies Incorporated
 (831) 475-5777 / (800) 247-8255 / (831) 475-9207 FAX

©1994, System Studies Incorporated
 Form #116EN-2E

FIGURE A4-11: WORKSHEET F (SIDE 1)

Worksheet F

Leak Locating on Trunk and Toll

Procedure:

Step 1 Take pressure reading (PSI) two to three pressure testing valves away from suspected leak location. Record reading in Box A on worksheet. Review Checklist

Step 2 Take a second pressure reading in direction of leak and record on worksheet. Use worksheet boxes in alphabetical order to record subsequent readings. Measure distance between pressure readings.

Step 3 Calculate pressure drop per foot using the calculation boxes below. Record every digit in the calculation's display window. Pressure drop per foot will be the same for each section until leak is passed.

Step 4 With second pressure reading and pressure drop per foot, calculate a Zero Leak Projection (ZLP) to limit area of search. Use the ZLP calculation boxes below and record ZLP area on worksheet.

Step 5 Take pressure readings midway between 2nd pressure reading and ZLP boundary. Calculate pressure drop per foot and compare with other calculations. Continue calculating pressure drop per foot on worksheet.

Step 6 Record all distance measurements, pressure readings, calculations and pressure drops per foot on worksheet.

Equipment and Procedures Required:

- C Pressure Gauge
- Portable Flow Rater (0-20 SCFH)
- Flow Direction Indicator
- Ultrasonic Leak Locator or Soap Bucket
- Calculator
- Pneumatic Resistance Charts
- Zero Leak Projection
- Air Flow Calculation
- Back Projection

Task Number: _____

Found
 Not Found

Date: _____

Hours Worked: _____

Office: _____

Cable Number: _____

Name: _____

Cause of Problem:

Leaking Closure
 Missing Plug
 Leaking Plug
 Leaking Valve
 Section Leak
 Leaking Hardware
 Other

©1994, System Studies Incorporated
Form #116EN-2E

FIGURE A4-12: WORKSHEET F (SIDE 2)

Worksheet G

Reading Flows at the Flow Bank

Procedures at Flow Bank locations:

Step 1 Zero adjust the Flow Direction Gauge if necessary.

Step 2 Place the Flow Direction Sampler on the Flow Bank sampler valves to be read and obtain a flow measurement. The purple-colored quick connect valve attaches to the top tank valve. The yellow sampler valve is connected to one of the five Flow Bank cable ports. If the settled reading is pegged, depress the extended measurement button located on top of the Flow Direction Gauge.

Step 3 Record the flow measurement for each cable connected to the Flow Bank. Along with the flow measurement, indicate the direction of the flow (either toward the Flow Bank or toward the cable) and the pressure reading for the Flow Bank.

Equipment and Procedures Required:

C Pressure Gauge

Flow Gauge

Total Flow of all Flow Banks _____ SCFH

Task Number: _____

Date: _____

Hours Worked: _____

Office: _____

Pipe Route: _____

Name: _____

Review Checklist

©1994, System Studies Incorporated
Form #141EN-2E

FIGURE A4-14: WORKSHEET G (SIDE 2)